

ECOHOOG®

EHT-8220S

Ecohog Modular Trommel Screen

The EHT-8220S Trommel Screen is the supreme solution for waste processors requiring efficient screening. The modular trommel utilises multiple screen options offering up to 3 fraction material separation. Designed for quick setup, the trommel can incorporate plug and play conveyors suitable for any processing location.



KEY FEATURES

Up to 3 fraction separation;
Fines | Mid-size | Oversize
Available in 8m length
Modular design
Plug and play conveyors
Wheel drive design
Support legs and trestle for setup
Fully covered drum
Low transport costs
Quick setup and install
Integrated controls

SUITABLE FOR

- Scrap Metal
- Compost
- C&D/ C&I Waste
- Skip Waste
- Aggregate
- SRF/RDF
- MSW
- Biomass

OPTIONAL EXTRAS


- Ground Mounted Feed Hopper Trommel Attached Waste Feeder.
- Generator.
- Bunker Retaining Walls.
- Discharge Conveyors.
- **HYBRID** options available.

IDEAL FOR HIRE AND CONTRACT WORK WITH MULTIPLE SCREEN AND CONVEYOR OPTIONS AVAILABLE.

Ecohog HQ
Quarry Road | Carrickmore
Omagh | Co. Tyrone | N.I.
T (UK) +44 (0)28 8076 1295
info@ecohog.com



TECHNICAL DATA

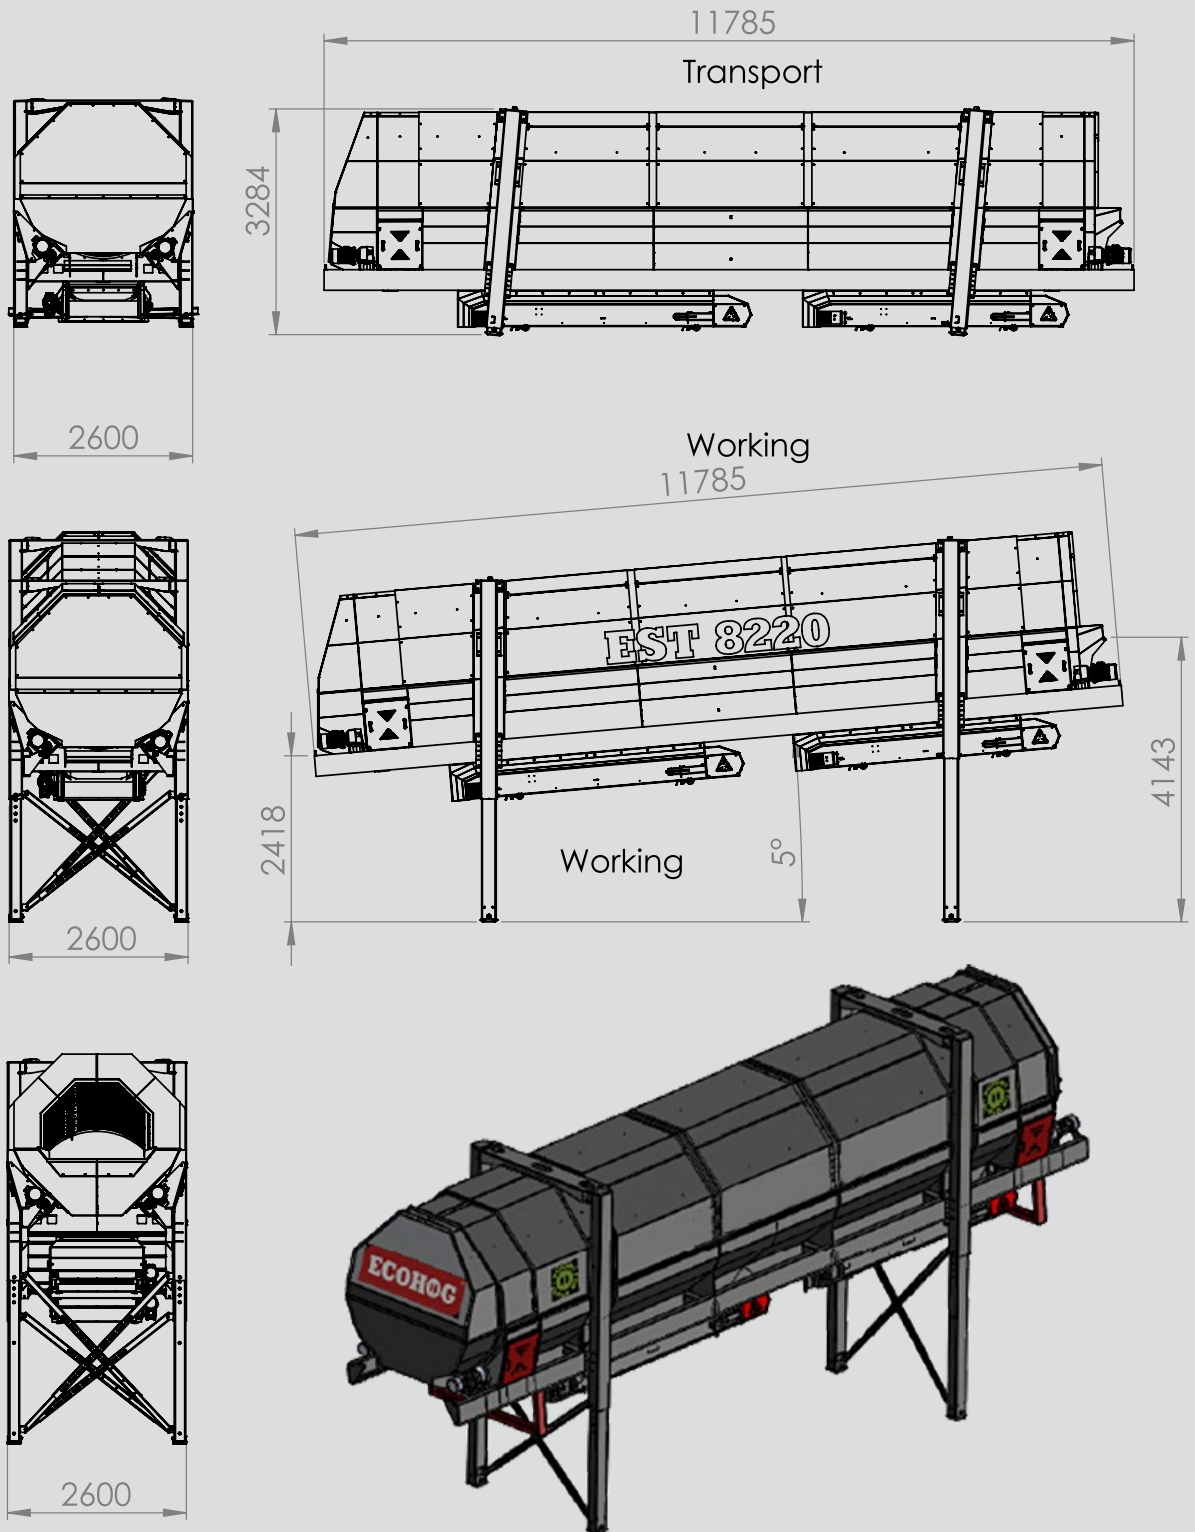

Please note: design and specification may be subject to change.

SPECIFICATION

EHT-8220S

Weight 17.5T (approx.)
Transport Length (11785 mm)
Transport Height (3284 mm)
Transport Width (2600 mm)
Operating Length (11785 mm)
Operating Height (4143 mm)
Operating Width (2600 mm)

Screen

Diameter (2000 mm)
Length (8000 mm)
VSD Controlled

Chassis

Steel Chassis
Galvanised Steel Support Legs
Adjustable Height
Adjustable Working Angle

Power Supply

HYBRID options available

UL Certification

All products supplied by Ecohog will be built to the highest specification and control panels will be UL Approved for the USA and Canadian markets.

